

世霖环宇(厦门)进出口有限公司 SL Global(Xiamen)Imp&Exp Co.,Ltd SL Global(Australia) Imp&Exp



由于印刷关系,可能与实际的产品颜色有所差异、型号、规格如有所改变将不另行通知, 选购时请以实际样板标注的信息为准!

Asin printing. The colors products may differ slightly with the real ones.

So the true products colors shall be followed in application.




SIZE:200X1000MM

FULL BODY STRAIGHT EDGE

WOOD GRAIN BRICK

通体直边木纹砖

雍容典雅·自然纯粹 | NATURAL ELEGANCE AND PURITY

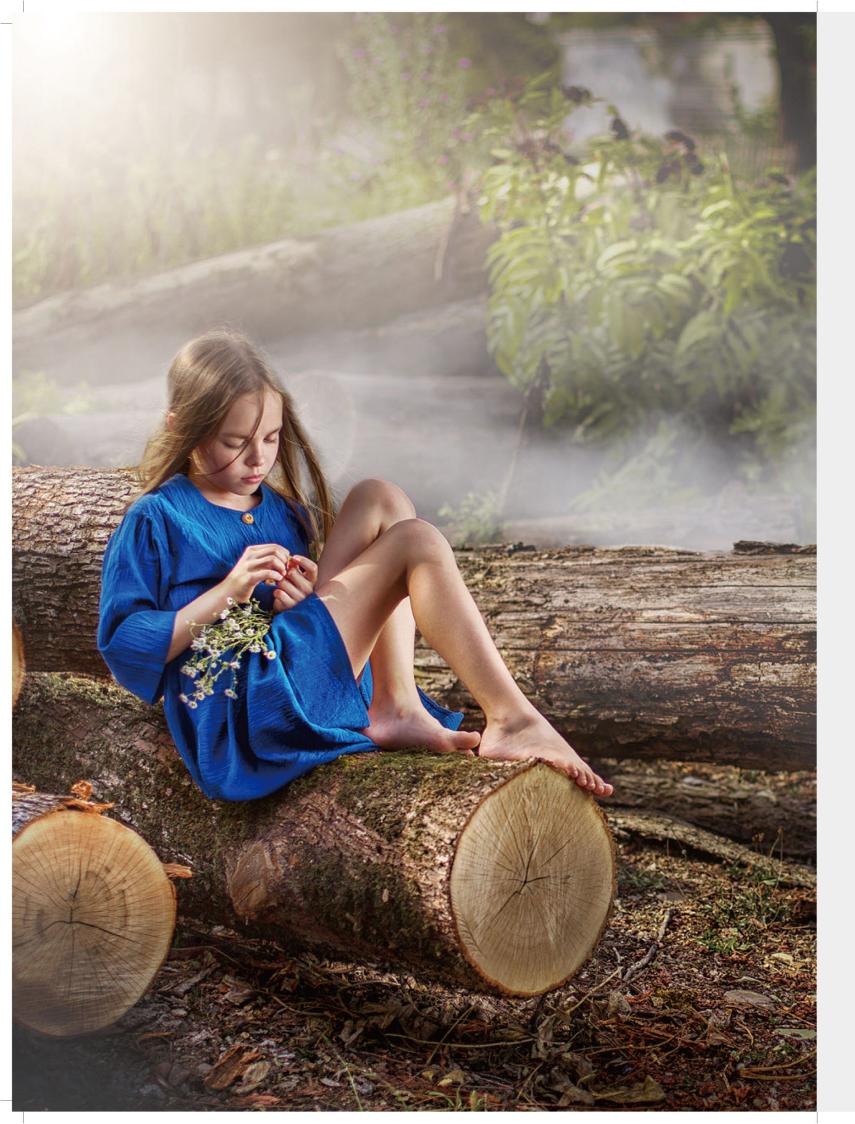

通体直边木纹砖

雍容典雅·自然純粹

黎明的曙光撩去夜幕的輕紗,待輕紗經風拂去, 其柔軟的光澤與典雅的肌理細膩交織,勾勒出濃郁的優雅氣息,滿足 人們對細膩的感受以及自然純粹的追求。

Natural Elegance And Purity

The dawn's rays sweep away the veil of night, Its soft luster and elegant texture are interwoven, delineating the rich elegant atmosphere, to meet people's delicate feeling and the pure pursuit of nature.



超低吸水率 Low water absorption



精修磨边

Fine grinding edge



一砖多面

A stone multiple face



高清映像 High-Definition image



进口釉料 Import glaze





WOOD GRAIN BRICK

通体直边木纹砖











FULL BODY STRAIGHT EDGE

通体直边木纹砖

WOOD GRAIN BRICK

产品工艺 PRODUCT PROCESS

- 超低吸水率 Low water absorption
- 精修磨边 Fine grinding edge
- 一砖多面 A stone multiple fa
- 高清映像 High-Definition in
- 进口釉料 Import glaze
- 安全防滑 Safety non-slip

通体直边木纹砖

0

品名 | NAME:**白桦木**

空间类型 | SPACE:**客厅**

型号 | NUMBER: FD20101

规格 | SIZE:**200X1000MM**

品名 | NAME:木光森林 空间类型 | SPACE:**客厅** 型号 | NUMBER: **FD20102** 规格 | SIZE:**200X1000MM**







WOOD GRAIN BRICK

通体直边木纹砖







FULL BODY STRAIGHT EDGE

WOOD GRAIN BRICK

通体直边木纹砖



瑞典洋杉 | SWEDISH FIR TREES





产品工艺 PRODUCT PROCESS

- 超低吸水率 Low water absorption
- 精修磨边 Fine grinding edge
- 一砖多面 A stone multiple fa
- 高清映像 High-Definition in
- 进口釉料 Import glaze
- 安全防滑 Safety non-slip



产品工艺 PRODUCT PROCESS 超低吸水率 Low water absorption

精修磨边 Fine grinding edg

一砖多面 A stone multiple fa

高清映像 High-Definition in

进口釉料 Import glaze

安全防滑 Safety non-slip



0

品名 | NAME:**北欧橡木**

空间类型 | SPACE:**餐厅**

型号 | NUMBER: FD20103

规格 | SIZE:**200X1000MM**



通体直边木纹砖

0

品名 | NAME:**瑞典洋杉** 空间类型 | SPACE:**西餐厅**

型号 | NUMBER: **FD20104**



通体直边木纹砖

C

品名 | NAME:北欧橡木 空间类型 | SPACE:休闲餐厅

型号 | NUMBER: FD20103

WOOD GRAIN BRICK

通体直边木纹砖







FULL BODY STRAIGHT EDGE

WOOD GRAIN BRICK

通体直边木纹砖

泰国柚木 | THAILAND TEAK





产品工艺 PRODUCT PROCESS 超低吸水率 Low water absorption

精修磨边 Fine grinding edge

一砖多面 A stone multiple fac

高清映像 High-Definition imag

进口釉料 Import glaze

安全防滑 Safety non-slip



PAGE/16

产品工艺 PRODUCT PROCESS

超低吸水率 Low water absorption

精修磨边 Fine grinding edge

一砖多面 A stone multiple face

高清映像 High-Definition in

进口釉料 Import glaze





通体直边木纹砖

0

品名 | NAME:**泰国柚木** 空间类型 | SPACE:**餐厅** 型号 | NUMBER: **FD20106** 规格 | SIZE:**200X1000MM**



品名 | NAME:热带雨林空间类型 | SPACE:卧室型号 | NUMBER:FD20105规格 | SIZE:200X1000MM

WOOD GRAIN BRICK

通体直边木纹砖





WOOD GRAIN BRICK

通体直边木纹砖

FULL BODY STRAIGHT EDGE

加州阳光 | CALIFORNIA SUNSHINE





产品工艺 PRODUCT PROCESS

超低吸水率 Low water absorption

精修磨边 Fine grinding edge

一砖多面 A stone multiple face

高清映像 High-Definition imag

进口釉料 Import glaze

安全防滑 Safety non-slip



PAGE/22

产品工艺 PRODUCT PROCESS

超低吸水率 Low water absorption

精修磨边 Fine grinding edge

一砖多面 A stone multiple face

高清映像 High-Definition in

进口釉料 Import glaze

通体直边木纹砖

品名 | NAME:**加州阳光** 空间类型 | SPACE:**卧室** 型号 | NUMBER: **FD20108**

规格 | SIZE:**200X1000MM**

O

品名 | NAME:**黄花梨木** 空间类型 | SPACE:**阳光房** 型号 | NUMBER: **FD20107**







0 品名 | NAME:**黄花梨木** 空间类型 | SPACE:**服饰店** 型号 | NUMBER: FD20107 规格 | SIZE:**200X1000MM**

BRICK

通体直边木纹砖

FULL BODY STRAIGHT EDGE WOOD GRAIN





通体直边木纹砖

0

品名 | NAME:**加州阳光** 空间类型 | SPACE:**工作室** 型号 | NUMBER: **FD20108**

WOOD GRAIN BRICK

通体直边木纹砖



木色枫尚 | WOODEN MAPLE FASHION








超低吸水率 Low water absorption

精修磨边 Fine grinding edge

一砖多面 A stone multiple face

高清映像 High-Definition in

进口釉料 Import glaze

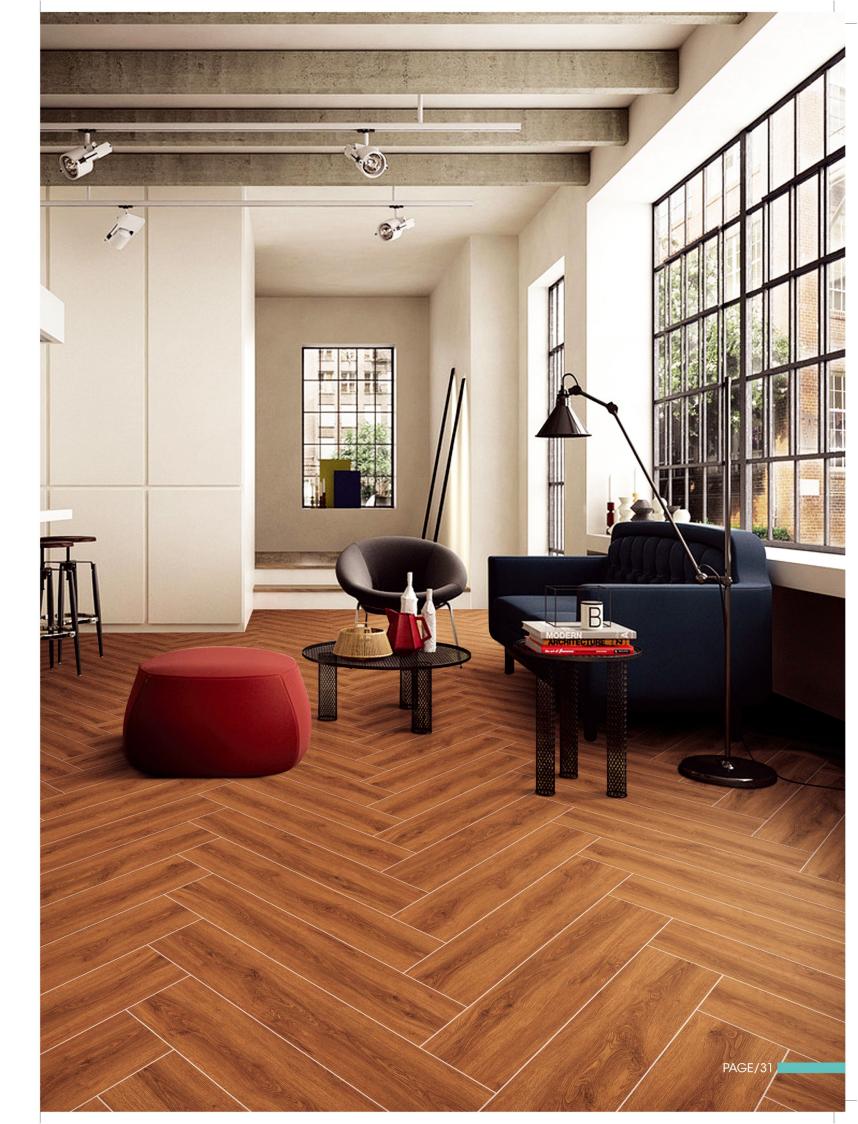



0

品名 | NAME:**木色枫尚** 空间类型 | SPACE:**餐厅** 型号 | NUMBER: **FD20109**



PRODUCTS CONFLUENCE 产品总汇

产品总汇

FULL BODY STRAIGHT EDGE WOOD GRAIN BRICK

通体直边木纹砖



FD20101 SIZE:200X1000MM

白桦木

瑞典洋杉



FD20104 SIZE:200X1000MM



FD20102 SIZE:200X1000MM



FD20105 热带雨林 SIZE:200X1000MM



FD20103 北欧橡木 SIZE:200X1000MM



FD20106 泰国柚木 SIZE:200X1000MM

FULL BODY STRAIGHT EDGE WOOD GRAIN BRICK

通体直边木纹砖





FD20108 加州阳光 SIZE:200X1000MM



FD20109 SIZE:200X1000MM


9 木色枫尚

THE SHOP IS STUCK TO GUIDE

铺贴指引

方案G

常见铺贴样式 I COMMON SPREAD PATTERN

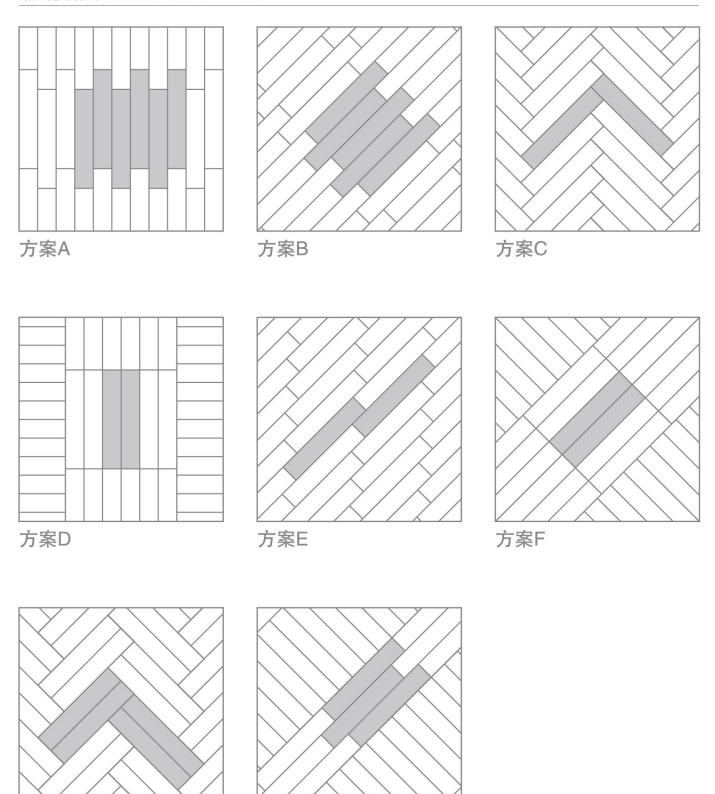

方案H

CONSTRUCTION SCHEME

木纹砖的铺贴使用介绍 INTRODUCTION OF WOOD GRAIN TILES PAVEMENT

- 1、确定方案:常用木纹砖的铺贴方式,除了与传统的陶瓷墙地砖一样的井子形中规中矩,横平竖直的铺贴方法外,木纹砖还有人字形、工字形、斜形菱线等铺贴方法。铺贴方式可谓是多种多样,各有千秋,所以一定要与设计师一起先确定方案。
- 2、找平:所谓找平,即时在铺木纹砖前,应对铺贴的建筑物地面或墙面表面进行处理。如地面、内墙、外墙等。消除表面的附着物,用半湿水泥沙混合铺平。
- 3、弹线:弹线即是指用一段长的细线,涂上白灰货墨汁,确定砖的中轴线,然后按线铺贴。
- 4、选砖:要看计划铺的砖的品种,挑选出来分门别类放好。比如说铺地木纹砖、上墙的木纹砖、地脚线的木纹砖等要区分开来,以免铺起来弄混了。
- 5、浸砖:木纹砖与抛光砖、仿古砖一样要浸泡水,要用自来水或清水,不能用浑水或脏水,更不能用油污水;浸泡时间不需太长时间,也就是说,泡湿即可。(瓷片则一定要泡透才能铺贴)
- 6、混浆:水泥沙应以1:2的比例混合,应采用标号低于200的水泥,标号太高的水泥会对木纹砖形成内应拉力,严重的会拉裂木纹砖。
- 7、涂浆: 取出浸泡好的木纹砖,擦干木纹砖的水渍,将水泥浆均匀涂抹在木纹砖背面,砂浆厚度在2-3厘米,随即将木纹砖往地面水泥沙面上铺,用木锤轻轻敲击木纹砖砖面,直至铺平平整、对线整齐为止。
- 8、铺贴:铺贴要注意木纹砖纹理顺序,注意看木纹砖砖底标示箭头等,木锤敲打避免空敲,力量要均衡,用力避免过大或过小。最好应用铺砖用的塑料十字架,这样可以更好给木纹砖定位。木锤敲打木纹砖缝反溢的水泥浆用海绵或抹布抹平即可。高档的木纹砖一般缝隙小于1毫米,不需专门填缝。
- 9、修整:木纹砖铺好,水泥还未完全干透,即可用肉眼观察或用水平尺测量,按照标准对木纹砖进行修整。检查砖铺贴的平整度,砖缝直线度等。发现问题,马上修整,严重的撬开木纹砖重新铺贴。
- 10、填缝:如要填缝则待水泥干了后用铁钩勾缝,再配以搭配颜色的填缝剂填缝。
- 1. Determine the scheme: The common paving method of wood–grain bricks is not only the well–shaped and regular, horizontal and vertical paving method like the traditional ceramic wall and floor tiles, but also the herringbone, l–shaped, oblique diamond line and other paving methods. It may be said that the way of paving is a variety of, each has its own merits, so we must decide the plan together with the designer.
- 2, leveling: the so-called leveling, immediately before the paving of wood brick, should be pasted on the building floor or wall surface treatment. Such as ground, interior walls, exterior walls, etc. Remove surface attachments and flatten with semi-wet water and sediment
- 3, elastic line: elastic line refers to a long fine line, coated with white ink, determine the central axis of the brick, and then paste according to the line.
- 4, choose brick: want to see the variety of the brick that the plan spreads, choose to come out classify put well. For instance the wood grain brick of the wood grain brick that spreads ground brick, wall, floor line should differentiate, lest spread rise mix.
- 5, dip brick: wood grain brick and polished brick, antique brick to soak water, to use tap water or clean water, can not use muddy water or dirty water, but also can not use oil sewage; Soaking time does not need to be too long, that is to say, soaking wet. (The tiles must be soaked through before being laid)
- 6. Slurry mixing; water and sediment should be mixed in a ratio of 1:2. Cement with a label of less than 200 should be used.
- 7. Grouting: take out the soaked wood bricks, wipe off the water stains of the wood bricks, evenly apply the cement slurry on the back of the wood bricks, with the mortar thickness of 2–3 cm, then spread the wood bricks to the water and sand surface of the ground, and gently knock the wood hammer on the wood brick surface until it is smooth and neat.
- 8. Paving: Pay attention to the texture sequence of wood grain bricks and the mark of arrow on the bottom of wood grain bricks. Avoid empty knocking with wood hammer, balance the force and avoid too much or too little force. It's best to use a plastic cross for bricklaying, which will better position the wood–grain bricks. A wooden hammer strikes the backflow of cement slurry between wood grain brick joints and flatters it with a sponge or rag. General gap of high–grade wood grain brick is less than 1 millimeter, do not need special fill seam.
- 9. Finishing: When the wood grain bricks are laid and the cement is not completely dry, the wood grain bricks can be dressed according to the standard by visual observation or horizontal measurement. Check the flatness of tile placement, straightness of tile joints, etc. Find the problem, immediately repair, seriously pry open the wood–grain brick and re–lay paste.
- 10. Seam filling: If you want to fill the seam, use iron hook to mark the seam after the cement dries, and then match the color of the seam filling agent.