



世霖环宇（厦门）进出口有限公司
SL Global(Xiamen)Imp&Exp Co.,Ltd
SL Global(Australia) Imp&Exp

PS

由于印刷关系，可能与实际的产品颜色有所差异、型号、规格如有所改变将不另行通知，
选购时请以实际样板标注的信息为准！

Asin printing.The colors products may differ slightly with the real ones.
So the true products colors shall be followed in application.



FULL BODY STRAIGHT EDGE

**WOOD
GRAIN BRICK**

150X900MM通体直边木纹砖



意大利  原创设计
Original Italian Design

NATURAL ELEGANCE AND PURITY | 雍容典雅 · 自然纯粹

Texture Made for you



质感·为您而造
每一次改变，都是品牌的一次进化
每一次进化，都是为了把事情变得更加简单

我们的改变，也是为了更加简单
但是一切看似的简单，都有着不简单的付出
去繁从简，只为更高品质，才能走得更远

Every change is an evolution of the brand
Every time we evolve, we try to make things easier

Our change is also to make it simpler
But all the seemingly simple, have not simple pay
To simplify, only for higher quality, to go further

雍容典雅·自然纯粹

黎明的曙光擦去夜幕的轻纱，待轻纱经风拂去，其柔软的光泽与典雅的肌理细腻交织，勾勒出浓郁的优雅气息，满足人们对细腻的感受以及自然纯粹的追求。

Natural Elegance And Purity

The dawn's rays sweep away the veil of night, Its soft luster and elegant texture are interwoven, delineating the rich elegant atmosphere, to meet people's delicate feeling and the pure pursuit of nature.



FULL BODY STRAIGHT EDGE

WOOD GRAIN BRICK

通体直边木纹砖

独特木纹层次的细腻质感
细细的品尝不经雕琢的自然之美，闭上眼
感受着空谷幽林的清灵气息
忘却烦恼琐事，享受那份难能可贵的清净生活。

木纹与空间的每一个惬意邂逅
The grain of wood meets each of
the space comfortably


FULL BODY
STRAIGHT EDGE
**WOOD
GRAIN BRICK**

通体直边木纹砖

FD915001
SIZE:150X900MM
木色枫尚

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915001(木色枫尚)进行铺贴 / 产品尺寸150X900MM



FULL BODY
STRAIGHT EDGE

WOOD GRAIN BRICK

通体直边木纹砖

选用产品: FD915001(木色枫尚)

空间类型: 厨 房

产品尺寸: 150X900MM


FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK

通体直边木纹砖

FD915002
SIZE: 150X900MM
芬兰松木

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915002(芬兰松木)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915002(芬兰松木)
空间类型: 服饰店
产品尺寸: 150X900MM




FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK

通体直边木纹砖

FD915003
SIZE:150X900MM
香樟木

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915003(香樟木)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915003(香樟木)
空间类型: 客厅
产品尺寸: 150X900MM





FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK

通体直边木纹砖

FD915004
SIZE:150X900MM
枫木雨林

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip

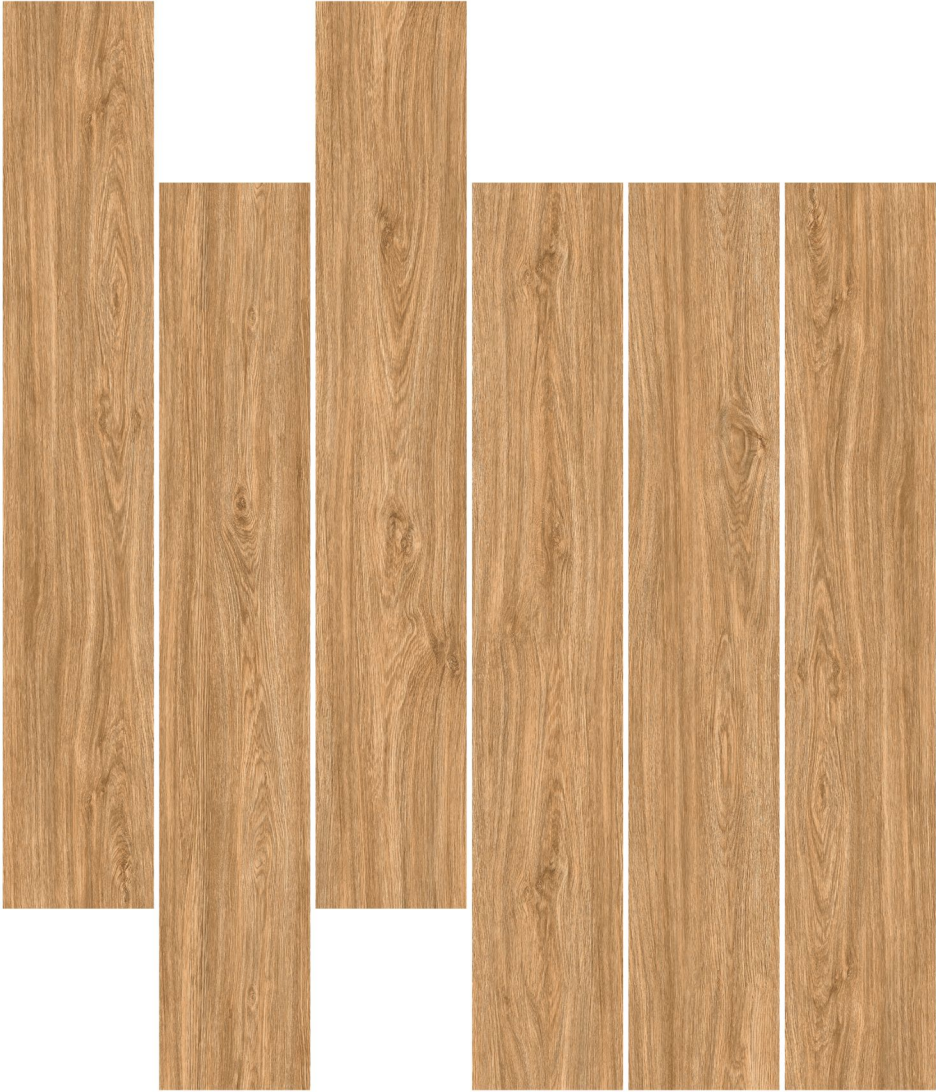

DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915004(枫木雨林)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915004(枫木雨林)
空间类型: 会所
产品尺寸: 150X900MM




FULL BODY
STRAIGHT EDGE
**WOOD
GRAIN BRICK**

通体直边木纹砖

FD915005
SIZE:150X900MM
梦幻香楠

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915005(梦幻香楠)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
**WOOD
GRAIN BRICK**
通体直边木纹砖

选用产品: FD915005(梦幻香楠)
空间类型: 客厅
产品尺寸: 150X900MM




FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK

通体直边木纹砖

FD915006
SIZE: 150X900MM
古堡柚木

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915006(古堡柚木)进行铺贴 / 产品尺寸150X900MM



FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915006(古堡柚木)
空间类型: 书房
产品尺寸: 150X900MM


FULL BODY
STRAIGHT EDGE
**WOOD
GRAIN BRICK**

通体直边木纹砖

FD915007
SIZE: 150X900MM
北欧臻木

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915007(北欧臻木)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915007(北欧臻木)
空间类型: 客厅
产品尺寸: 150X900MM




FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK

通体直边木纹砖

FD915008
SIZE:150X900MM
北美橡木

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS



本案例采用FD915008(北美橡木)进行铺贴 / 产品尺寸150X900MM



FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915008(北美橡木)
空间类型: 餐厅
产品尺寸: 150X900MM


FULL BODY
STRAIGHT EDGE
**WOOD
GRAIN BRICK**

通体直边木纹砖

FD915009
SIZE: 150X900MM
皇室红檀

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915009(皇室红檀)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915009(皇室红檀)
空间类型: 庭院
产品尺寸: 150X900MM


FULL BODY
STRAIGHT EDGE
**WOOD
GRAIN BRICK**

通体直边木纹砖

FD915010
SIZE: 150X900MM
加州阳光

产品工艺
PRODUCT PROCESS

- 超低吸水率
Low water absorption
- 精修磨边
Fine grinding edge
- 一砖多面
A stone multiple face
- 高清映像
High-Definition image
- 进口釉料
Import glaze
- 安全防滑
Safety non-slip



DIFFERENT
FACETS

实物拍照 REAL PHOTO



本案例采用FD915010(加州阳光)进行铺贴 / 产品尺寸150X900MM

FULL BODY
STRAIGHT EDGE
WOOD
GRAIN BRICK
通体直边木纹砖

选用产品: FD915010(加州阳光)
空间类型: 书房
产品尺寸: 150X900MM



FULL BODY STRAIGHT EDGE
WOOD GRAIN BRICK
通体直边木纹砖



FD915001 木色枫尚
SIZE:150X900MM



FD915002 芬兰松木
SIZE:150X900MM



FD915003 香樟木
SIZE:150X900MM



FD915004 枫木雨林
SIZE:150X900MM



FD915005 梦幻香楠
SIZE:150X900MM



FD915006 古堡柚木
SIZE:150X900MM

FULL BODY STRAIGHT EDGE
WOOD GRAIN BRICK
通体直边木纹砖



FD915007 北欧臻木
SIZE:150X900MM



FD915008 北欧橡木
SIZE:150X900MM




FD915009 皇室红檀
SIZE:150X900MM




FD915010 加州阳光
SIZE:150X900MM


常见铺贴样式 | COMMON SPREAD PATTERN

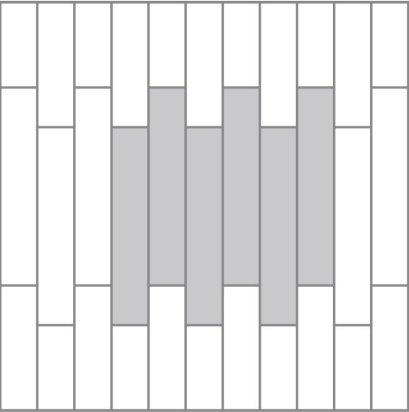


方案A

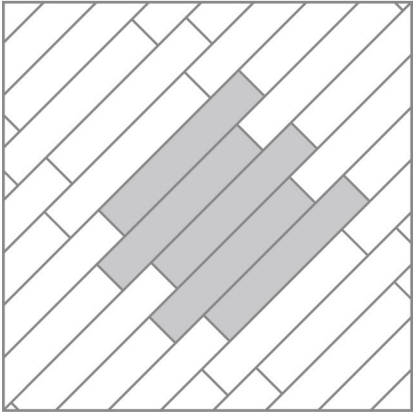


方案B

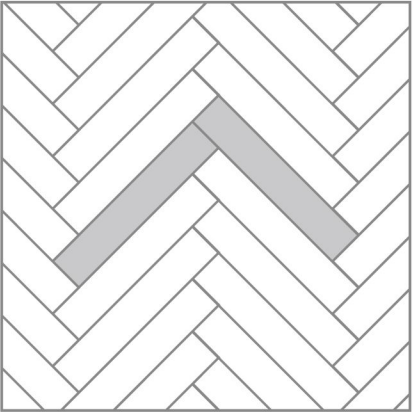


方案C

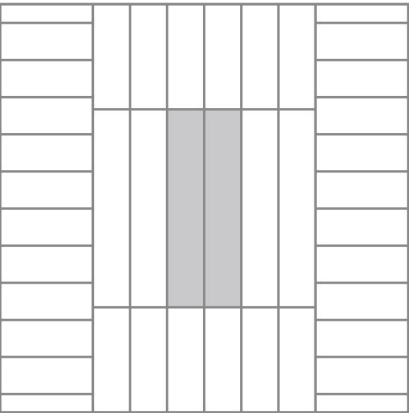


方案D

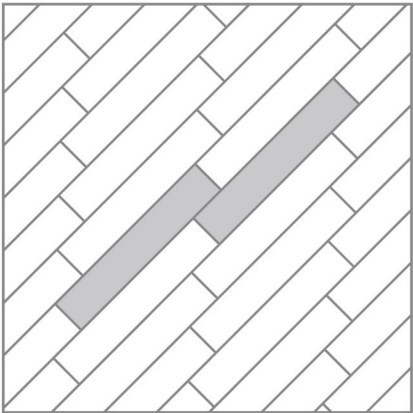


方案E

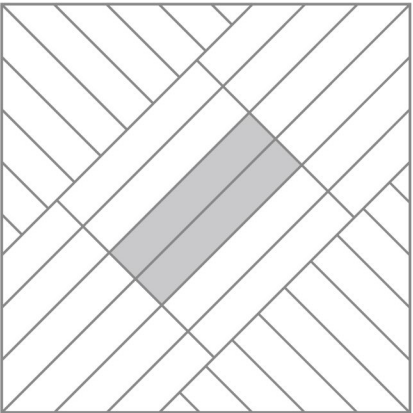

方案F

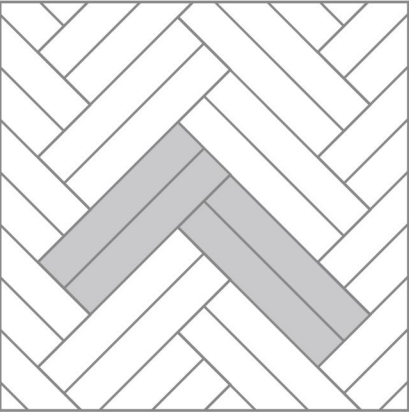

方案G

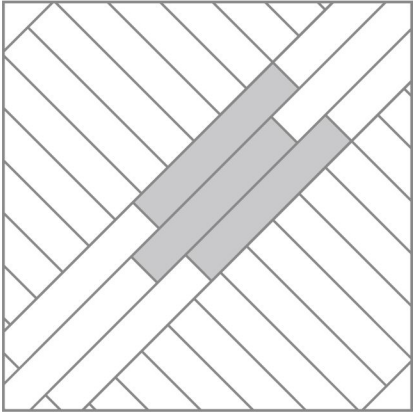

方案H

木纹砖的铺贴使用介绍
INTRODUCTION OF WOOD GRAIN TILES PAVEMENT

- 1、确定方案：常用木纹砖的铺贴方式，除了与传统的陶瓷墙地砖一样的井子形中规中矩，横平竖直的铺贴方法外，木纹砖还有人字形、工字形、斜形菱线等铺贴方法。铺贴方式可谓多种多样,各有千秋,所以一定要与设计师一起先确定方案。
- 2、找平：所谓找平，即时在铺木纹砖前，应对铺贴的建筑物地面或墙面表面进行处理。如地面、内墙、外墙等。消除表面的附着物，用半湿水泥沙混合铺平。
- 3、弹线：弹线即是指用一段长的细线，涂上白灰货墨汁，确定砖的中轴线，然后按线铺贴。
- 4、选砖：要看计划铺的砖的品种，挑选出来分门别类放好。比如说铺地木纹砖、上墙的木纹砖、地脚线的木纹砖等要区分开来，以免铺起来弄混了。
- 5、浸砖：木纹砖与抛光砖、仿古砖一样要浸泡水，要用自来水或清水，不能用浑水或脏水，更不能用油污水；浸泡时间不需太长时间，也就是说，泡湿即可。（瓷片则一定要泡透才能铺贴）
- 6、混浆：水泥沙应以1：2的比例混合，应采用标号低于200的水泥，标号太高的水泥会对木纹砖形成内应拉力，严重的会拉裂木纹砖。
- 7、涂浆：取出浸泡好的木纹砖，擦干木纹砖的水渍，将水泥浆均匀涂抹在木纹砖背面，砂浆厚度在2-3厘米，随即将木纹砖往地面水泥沙面上铺，用木锤轻轻敲击木纹砖砖面，直至铺平整、对线整齐为止。
- 8、铺贴：铺贴要注意木纹砖纹理顺序，注意看木纹砖砖底标示箭头等，木锤敲打避免空敲，力量要均衡，用力避免过大或过小。最好应用铺砖用的塑料十字架，这样可以更好给木纹砖定位。木锤敲打木纹砖缝反溢的水泥浆用海绵或抹布抹平即可。高档的木纹砖一般缝隙小于1毫米，不需专门填缝。
- 9、修整：木纹砖铺好，水泥还未完全干透，即可用肉眼观察或用水平尺测量，按照标准对木纹砖进行修整。检查砖铺贴的平整度，砖缝直线度等。发现问题，马上修整，严重的撬开木纹砖重新铺贴。
- 10、填缝：如要填缝则待水泥干了后用铁钩勾缝，再配以搭配颜色的填缝剂填缝。

1. Determine the scheme: The common paving method of wood-grain bricks is not only the well-shaped and regular, horizontal and vertical paving method like the traditional ceramic wall and floor tiles, but also the herringbone, I-shaped, oblique diamond line and other paving methods. It may be said that the way of paving is a variety of, each has its own merits, so we must decide the plan together with the designer.
- 2, leveling: the so-called leveling, immediately before the paving of wood brick, should be pasted on the building floor or wall surface treatment. Such as ground, interior walls, exterior walls, etc. Remove surface attachments and flatten with semi-wet water and sediment.
- 3, elastic line: elastic line refers to a long fine line, coated with white ink, determine the central axis of the brick, and then paste according to the line.
- 4, choose brick: want to see the variety of the brick that the plan spreads, choose to come out classify put well. For instance the wood grain brick of the wood grain brick that spreads ground brick, wall, floor line should differentiate, lest spread rise mix.
- 5, dip brick: wood grain brick and polished brick, antique brick to soak water, to use tap water or clean water, can not use muddy water or dirty water, but also can not use oil sewage; Soaking time does not need to be too long, that is to say, soaking wet. (The tiles must be soaked through before being laid)
6. Slurry mixing: water and sediment should be mixed in a ratio of 1:2. Cement with a label of less than 200 should be used.
7. Grouting: take out the soaked wood bricks, wipe off the water stains of the wood bricks, evenly apply the cement slurry on the back of the wood bricks, with the mortar thickness of 2-3 cm, then spread the wood bricks to the water and sand surface of the ground, and gently knock the wood hammer on the wood brick surface until it is smooth and neat.
8. Paving: Pay attention to the texture sequence of wood grain bricks and the mark of arrow on the bottom of wood grain bricks. Avoid empty knocking with wood hammer, balance the force and avoid too much or too little force. It's best to use a plastic cross for bricklaying, which will better position the wood-grain bricks. A wooden hammer strikes the backflow of cement slurry between wood grain brick joints and flatters it with a sponge or rag. General gap of high-grade wood grain brick is less than 1 millimeter, do not need special fill seam.
9. Finishing: When the wood grain bricks are laid and the cement is not completely dry, the wood grain bricks can be dressed according to the standard by visual observation or horizontal measurement. Check the flatness of tile placement, straightness of tile joints, etc. Find the problem, immediately repair, seriously pry open the wood-grain brick and re-lay paste.
10. Seam filling: If you want to fill the seam, use iron hook to mark the seam after the cement dries, and then match the color of the seam filling agent.